


CATALOGUE, 1896.

THESE WANT THE EARTH

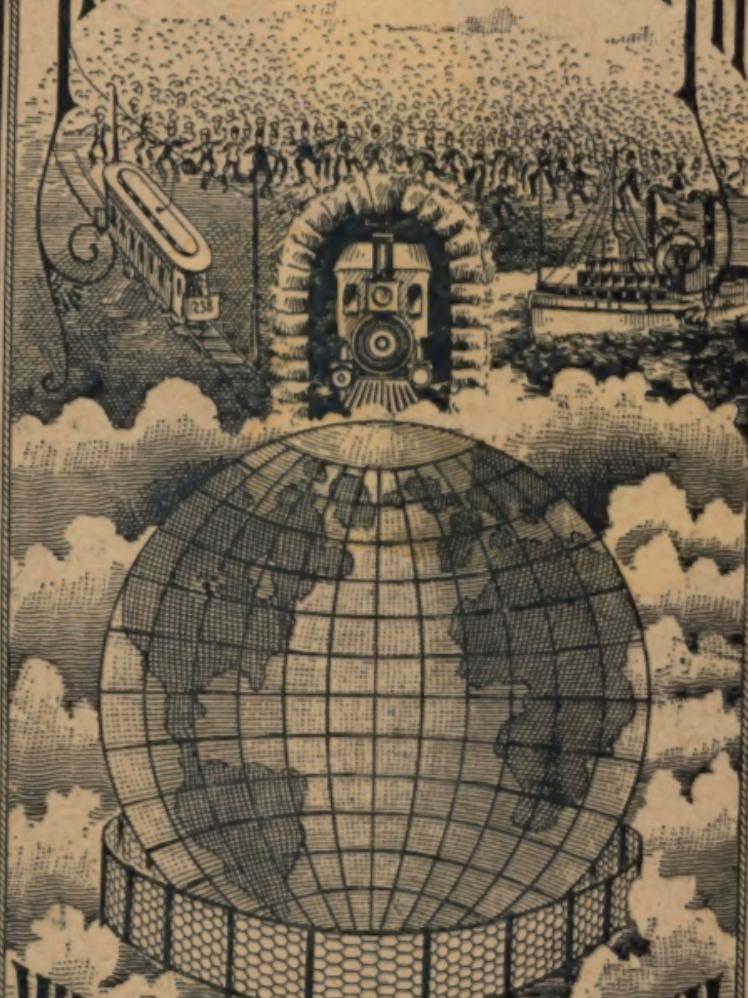


WE ONLY WANT TO FENCE JAPAN

THE McMULLEN
WOVEN WIRE FENCE CO.

114-116-118-120 Orleans St.,
(Formerly N. Market St.,)

CHICAGO, ILL

PLEASE DESTROY ALL OTHERS.

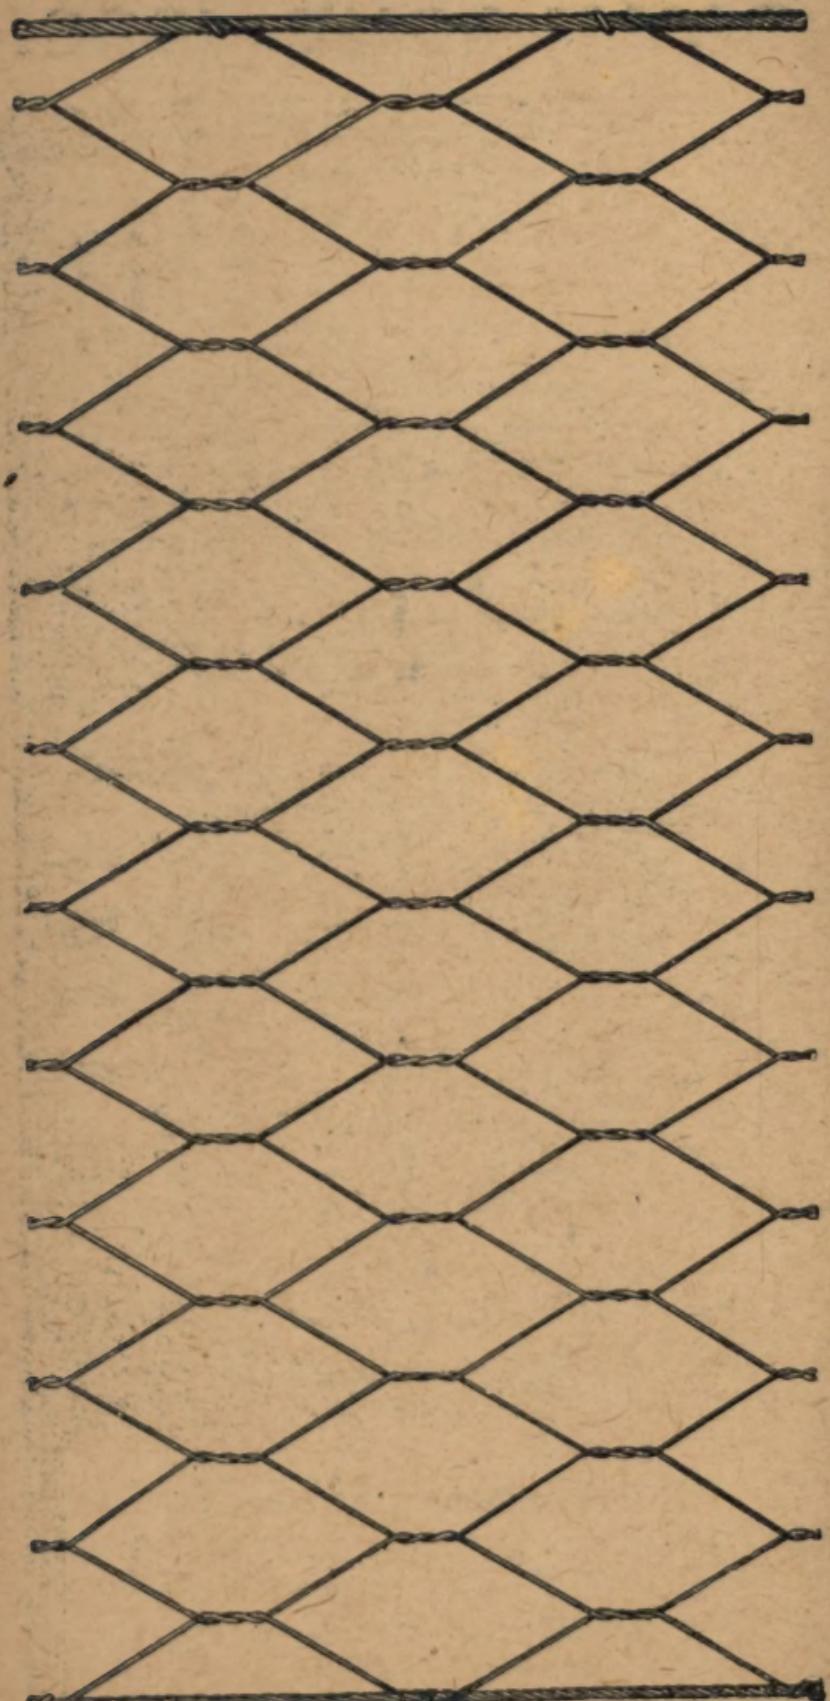

Section of McMullen's Woven Wire Fencing,
showing style of mesh and twisted wire rope selvage.
The widths of our netting are given as woven in the machine.
Owing to spring of the wire it sometimes appears
to lack a trifle in width. In erecting, it should be allowed
to come to the width to which it naturally adjusts itself.

McMULLEN'S

Woven Wire Fencing

PRICE LIST, 1896.

SUBJECT TO CHANGE WITHOUT NOTICE.

Mesh 2x4 in.; Selvage No. 14, Mesh No. 15 Wire

19 in. wide, \$0.65 per rod.	49 in. wide, \$1.40 per rod.
25 " .75 "	55 " 1.55 "
31 " .90 "	61 " 1.70 "
37 " 1.08 "	67 " 1.85 "
43 " 1.25 "	73 " 2.00 "

Mesh 3 x 6 inches, all No. 14 Wire.

20 in. wide, \$0.60 per rod.	47 in. wide, \$1.02 per rod.
23 " .65 "	53 " 1.10 "
26 " .70 "	59 " 1.18 "
29 " .76 "	65 " 1.26 "
35 " .86 "	71 " 1.35 "
41 " .94 "	77 " 1.45 "

Mesh 4 x 8 inches, all No. 13 Wire.

18 in. wide, \$0.55 per rod.	50 in. wide, \$1.00 per rod.
22 " .60 "	54 " 1.05 "
26 " .65 "	58 " 1.10 "
30 " .72 "	62 " 1.15 "
34 " .80 "	66 " 1.20 "
38 " .85 "	70 " 1.25 "
42 " .90 "	74 " 1.30 "
46 " .95 "	78 " 1.35 "

Mesh 5½ x 10½ inches, all No. 13 Wire.

20 inches wide.....	\$0.50 per rod.
25½ "57 "
31 "63 "
36½ "70 "
42 "75 "
47½ "80 "
53 "85 "

Mesh 6½ x 14 inches, all No. 13 Wire.

24 inches wide.....	\$0.40 per rod
30½ "45 "
37 "50 "
43½ "55 "
50 "60 "

When ordering give width of Fencing and size of mesh.

Put up in rolls of 20 rods (330 feet), except when over 54 inches in height, then in rolls of 10 rods. Special orders furnished in any desired length. (See next page.)

McMULLEN'S HOG FENCING

PRICE LIST, 1896.

SUBJECT TO CHANGE WITHOUT NOTICE.

Three Sizes of Mesh. The Best Made.

Mesh 4 x 8 inches.

Selvages No. 13 wire; meshes No. 14 wire.
22 inches wide..... per rod, **\$0.50**

Mesh 3 x 6 inches.

Selvages No. 14 wire; meshes No. 15 wire.
22 inches wide..... per rod, **\$0.50**

Mesh 2 x 4 inches.

Selvages No. 15 wire; meshes No. 17 wire.
21 inches wide..... per rod, **\$0.50**

~~REG~~-FREIGHT allowed from Chicago to any railway station in the United States east of the west line of the Dakotas, Nebraska, Kansas and Texas on **twenty rods** or more of Fencing, and Gates if shipped with that amount of Fencing. West of that line we allow, in lieu of freight, \$1.00 per 100 lbs. on 20 rods or more of Fencing and any Gates shipped with that amount of Fencing.

No freight allowed anywhere on Gates alone or less than twenty rods of Fencing.

~~REG~~ The above applies to goods listed on pages 3, 4, 6, 7.

DIRECTIONS FOR ERECTING OUR FENCING

Set your posts firmly in the ground, at least three feet down. Use posts enough to make a good fence. Put a good brace at the first or straining post. Mark your posts where you desire the top selvage to come. Do not try to stretch the web to make it unnaturally wide. Drive a nail part way into each post on the line near the top of the post. Unroll the fencing and hang it on these nails, drawing it out straight. Staple the selvages and intermediate wires firmly to first post. Be careful that the end of the web is square; that is, that the twists are each above the other, true. Take a "ratchet" stretcher and draw top selvage quite tight, and staple it for say 200 feet while being drawn. Then draw the bottom selvage moderately tight, and give the top selvage another stretch so as to make it very tight. You can draw with your hands the intermediate wires to keep them even with selvages. Be careful to have selvages straight and tight, but do not attempt to unduly expand the netting at the posts; simply make it hang smooth on the posts at width it will easily come to. If there are any large obstructions, remove them if possible; if impossible or the ground is uneven, cut the web at the top in starting up hill, and at the bottom going down hill. Galvanized staples are the best. They and "ratchet" stretchers are both sold by dealers, or we can supply them at prices given on page 11.

McMULLEN'S HEX POULTRY NETTING.


DISCOUNTS, FREIGHT, TERMS, ETC.,
FURNISHED ON APPLICATION.

We manufacture and aim to keep in stock **two inch, one and one-half inch and one inch** Hex Poultry Netting, made of best galvanized steel wire (three strands in each selvage) in widths varying every six inches, from one to eight feet, in following sizes of wire:

MESH	NO. WIRE.	LIST.	STOCK WIDTHS.
2 in.	14	9½c. sq. ft.	12, 18, 24, 30, 36, 42, 48, 54, 60, 66, 72, 78, 84, 90, 96 inches.
2 "	15	7¾c. "	
2 "	16	5½c. "	We carry in stock all the above widths in each size of mesh and wire named in this list.
2 "	17	4½c. "	
2 "	18	3¼c. "	Special widths or odd lengths made if required, without extra charge.
2 "	19	2½c. "	
2 "	20	2¼c. "	
1½ "	17	7¼c. "	
1½ "	18	4½c. "	Please note that McMullen's Poultry Netting can be furnished any width up to 96 inches.
1½ "	19	3½c. "	
1½ "	20	3c. "	
1 "	18	7¾c. "	
1 "	19	6½c. "	
1 "	20	5½c. "	

150 LINEAR FEET IN EACH ROLL.


No Extra Charge for Cut Rolls.

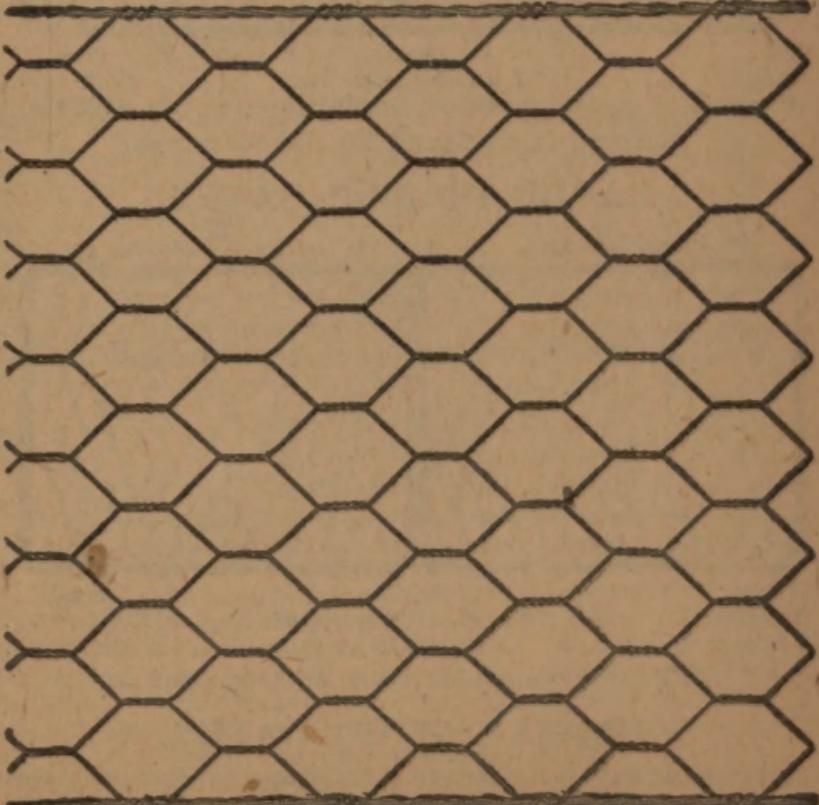

No Freight Allowed anywhere on less than
Five Rolls of Poultry Netting.

McMULLEN'S WOVEN WIRE GATES

With **T** STEEL frames (far superior to gas-pipe frames),
Ornamental Top, Hinges and Latches complete.
Size of Mesh, same as Fencing ordered.

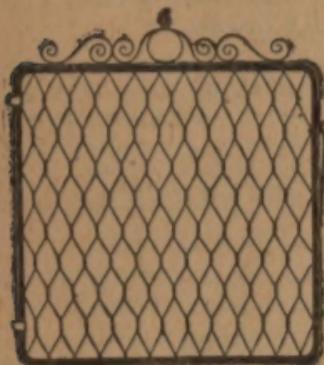


PRICE LIST. — Subject to
change without notice.

SMALL GATES.

Width.	Heights.	Price.
36 in....	36, 42, 48, 54 in.	\$4.25 ea.
42 in....	36, 42, 48, 54 in.	4.40 ea.
48 in....	42, 48, 54 in.	4.50 ea.

Without Ornamental Top,
50 cents less.


LARGE SINGLE GATES.

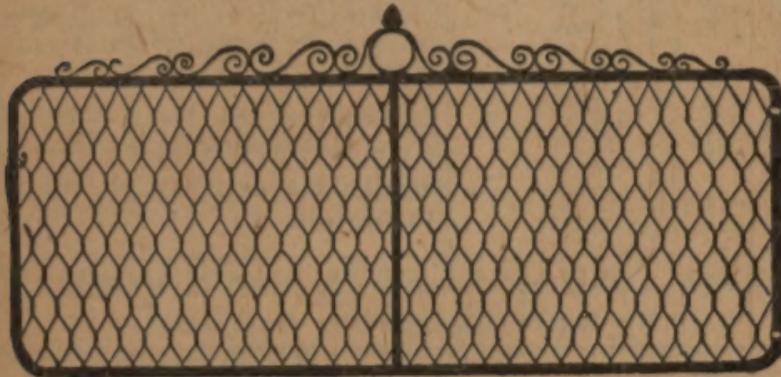

Width.	Heights.	Price.
8 feet.....	36, 42, 48, 54 inches.....	\$9.00 each
10 feet	42, 48, 54 inches.....	10.00 each

Without Ornamental Top, 75 cents less.

LARGE DOUBLE GATES.

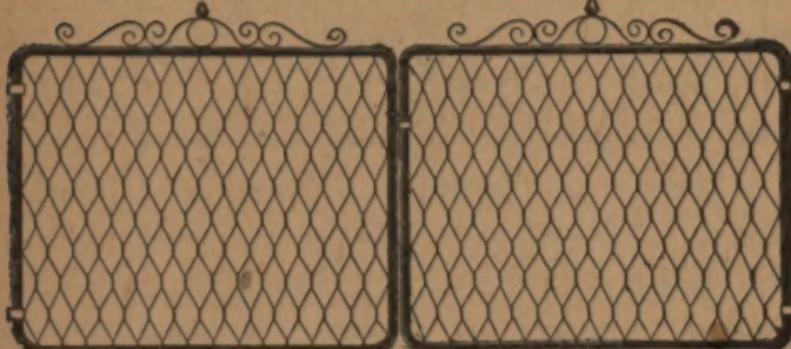

Width.	Heights.	Price.
5 feet.....	36, 42, 48, 54 inches.....	\$11.00 per pr.
6 feet.....	42, 48, 54 inches.....	12.00 per pr.

Without Ornamental Tops, \$1.00 less per pair.


SPECIAL SIZED GATES.

We are always prepared to furnish special sizes of gates
at very reasonable prices.

When ordering give width and height, and whether
wood or steel frames

McMULLEN'S WOVEN WIRE GATES.

With Wooden Frames, Plain Tops, Hinges and Latches complete. Size of Mesh, same as fencing ordered.




PRICE LIST. — Subject to change without notice.

SMALL GATES.

Width.	Heights.	Price.
36 in.....	36, 42, 48, 54 in...	\$3.00 ea.
42 in.....	36, 42, 48, 54 in...	3.15 ea.
48 in.....	42, 48, 54 in...	3.25 ea.

Ornamental Top, 50c. extra.


LARGE SINGLE GATES.

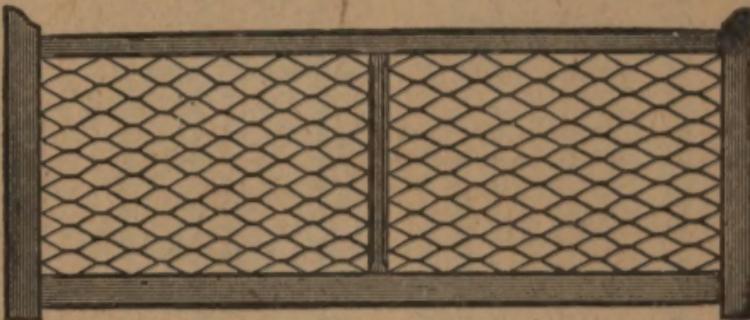

Width.	Heights.	Price.
8 feet.....	36, 42, 48, 54 inches.....	\$5.00 each
10 feet.....	36, 42, 48, 54 inches	5.50 each
12 feet.....	42, 48, 54 inches.....	6.00 each

Ornamental Top, 75 cents extra.

LARGE DOUBLE GATES.

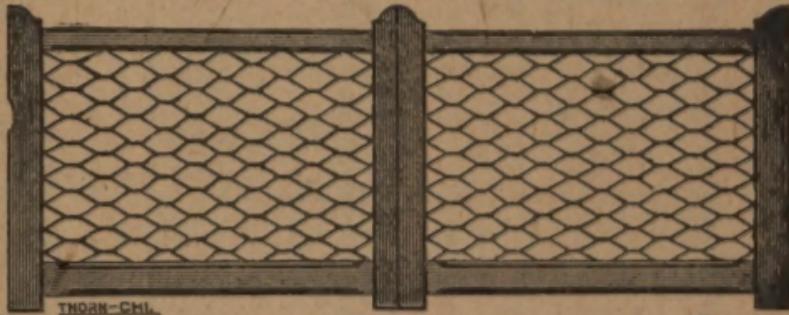

Width.	Heights.	Price.
5 feet.....	36, 42, 48, 54 inches	\$6.50 per pr.
6 feet.....	42, 48, 54 inches	7.00 per pr.


Ornamental Tops, \$1.00 extra per pair

When ordering, give width and height, and whether Wood or Steel Frames.


FREIGHT allowed from Chicago to any railway station in the United States east of the west line of the Dakotas, Nebraska, Kansas and Texas on **20 rods** or more of Fencing, and Gates if shipped with that amount of Fencing. **WEST** of that line we allow, in lieu of freight, \$1.00 per 100 lbs. on **20 rods** or more of Fencing, and on Gates if accompanying that amount of Fencing.

No freight paid or allowed anywhere on Gates alone, or less than **20 rods** of Fencing.

McMULLEN'S ALL-STEEL FENCING FOR LAWNS AND CEMETERY LOTS.

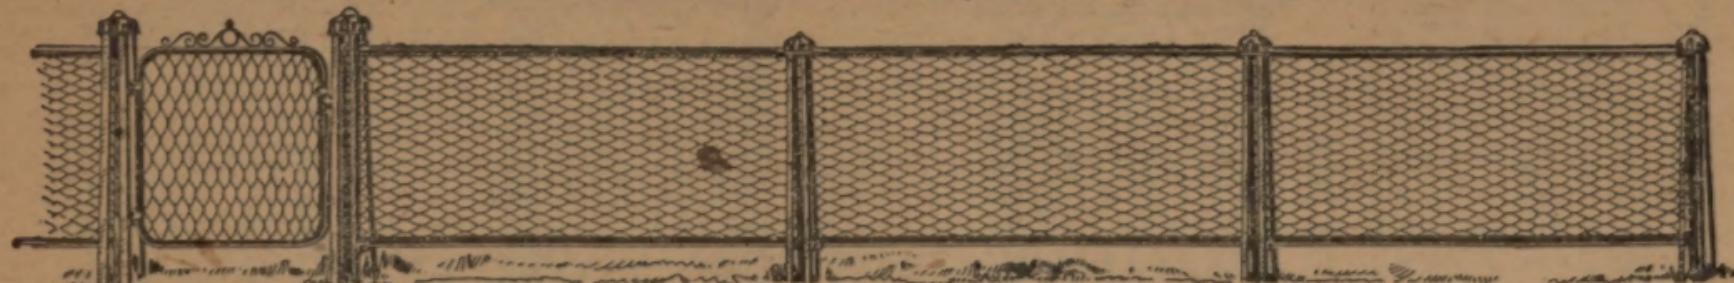


STYLE No. 1.—Continuous piece of Netting running through posts. With Posts, Gates, etc., complete.

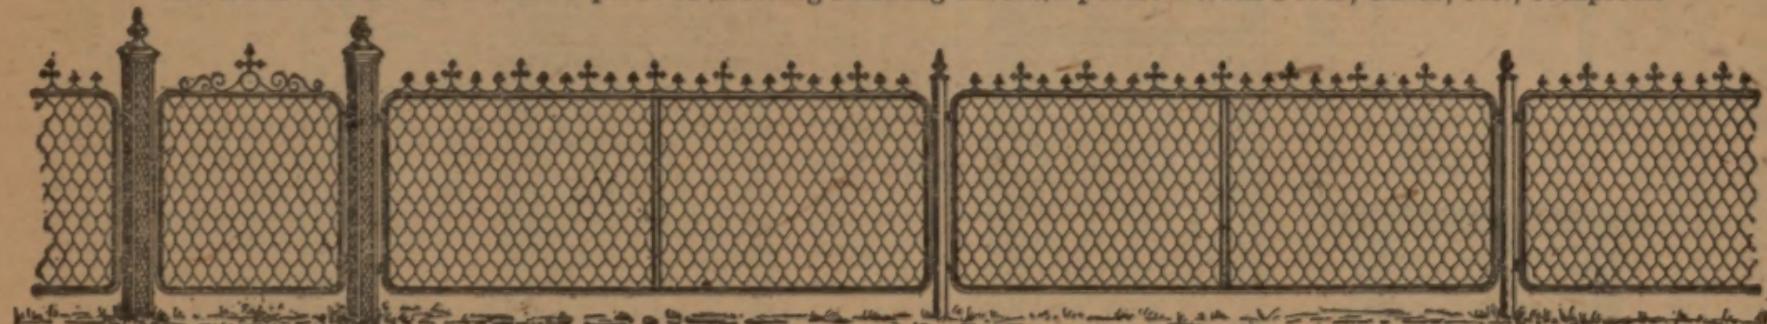


STYLE No. 2.—Made in panels. With Posts, Gates, etc., complete. Very easy to erect.

Price for either style, F. O. B. Chicago, \$1.00 per lineal foot for over three feet and not over four feet, and 90 cents per foot for heights of three feet or less. Extra charge for Posts when the order is for less than twenty-five feet of all-Steel Fencing. **No freight allowed on this kind of fencing.** Delivered F. O. B. Chicago.

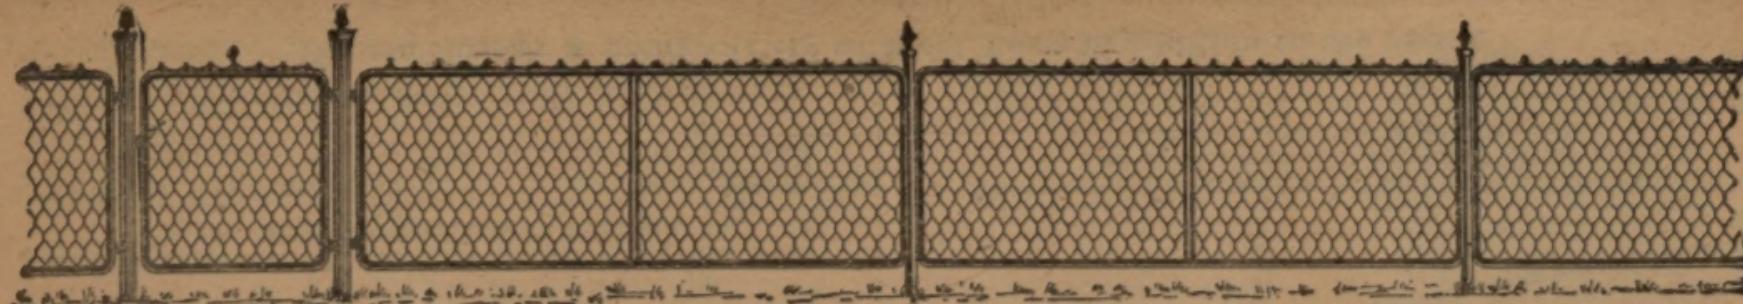


STYLE No. 3.—Made in panels, similar to No. 2, but not so ornamental. Posts, Gates, etc., complete, ready for erection. Price, F. O. B. Chicago, 80 cents per lineal foot over three feet high and not over four feet; 70 cents per lineal foot for three feet high or less. Extra charge for Posts when the order is for less than twenty-five feet of all-Steel Fencing.

NO FREIGHT ALLOWED ON ABOVE KINDS OF FENCING.

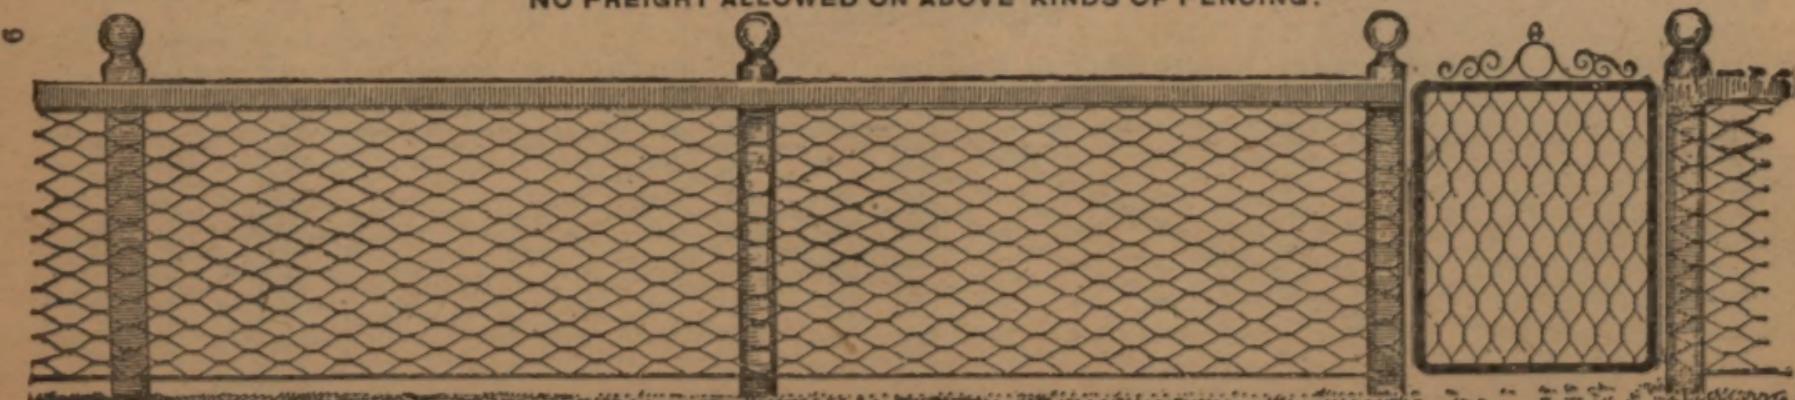

STYLE No. 4.—(Netting and Gates only furnished.) An illustration of **McMullen's Woven Wire Fencing** on turned wooden posts, with top rail, and one of **McMullen's Steel Framed Gates**. An exceedingly neat fence at low cost.

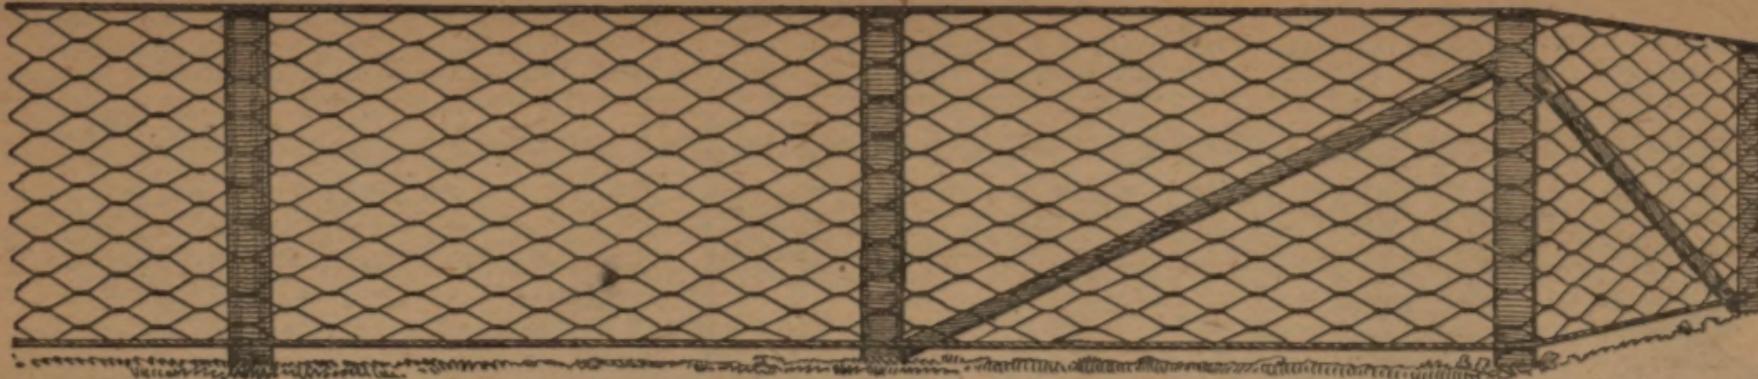

STYLE No. 5. (Netting only furnished.) An illustration of **McMullen's Woven Wire Fencing** on Wooden Posts, without Top Rail.

STEEL POSTS.



Above cut represents **T** Steel Post with Wing and Foot Pieces. Prices separate from Fencing.

Over 5 feet, less than 7 feet.....	each, \$1.00
5 feet or less.....	each, .75

No freight allowed on Steel Posts. Deliv. F.O.B. Chicago.




Above cut represents Angle Steel Post, with Brace, Wing and Foot Piece for Gate and Corner Post.

Prices separate from Fencing.

Over 5 feet, less than 7 feet.....	each, \$1.50
5 feet or less.....	each, 1.00

We can furnish a great variety of Steel Posts in addition to the above.

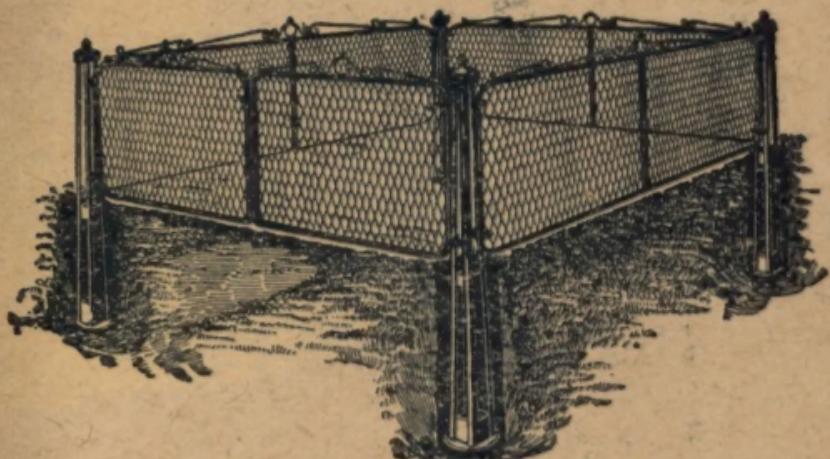

CEMETERY LOT FENCING.

Entirely of steel, with Posts and Gate complete. Price, including Gate and Posts, if 25 feet or over in length:

Over 3 feet and not over 4 feet high per foot, **\$1.00**

For 3 feet high or less per foot, **.90**

Extra for Posts, on orders less than 25 feet, each, **2.00**




MALLEABLE CRESTINGS, 10 cents Each.

Length, 12 inches. No freight allowed except when shipped with 20 rods or more of Fencing.

TOOLS AND STAPLES.

Combined Cutter and Nippers	each, \$1.00
Ratchet Stretchers	" .90
Galvanized Staples, $1\frac{1}{4}$ and $1\frac{3}{4}$ inch	per pound, .05
" " 1 inch	.06
" " $\frac{3}{4}$ inch	.08

No freight allowed on Tools and Staples when shipped alone.

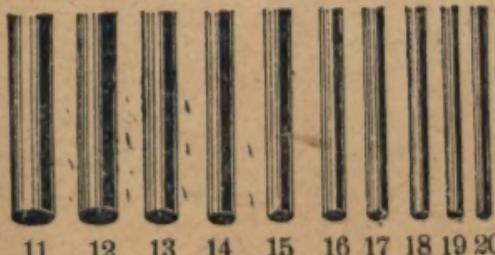

The sizes of wires are the proportions of an inch indicated by the numbers.


Here we give sizes from No. 11 to 20.



Digitized by ASSOCIATION FOR PRESERVATION TECHNOLOGY, www.apti.org for the
BUILDING TECHNOLOGY HERITAGE LIBRARY

<https://archive.org/details/buildingtechnologyheritagelibrary>

From the collection of Gerron S. Hite, West Texas Collection, Angelo State University, San Angelo, TX

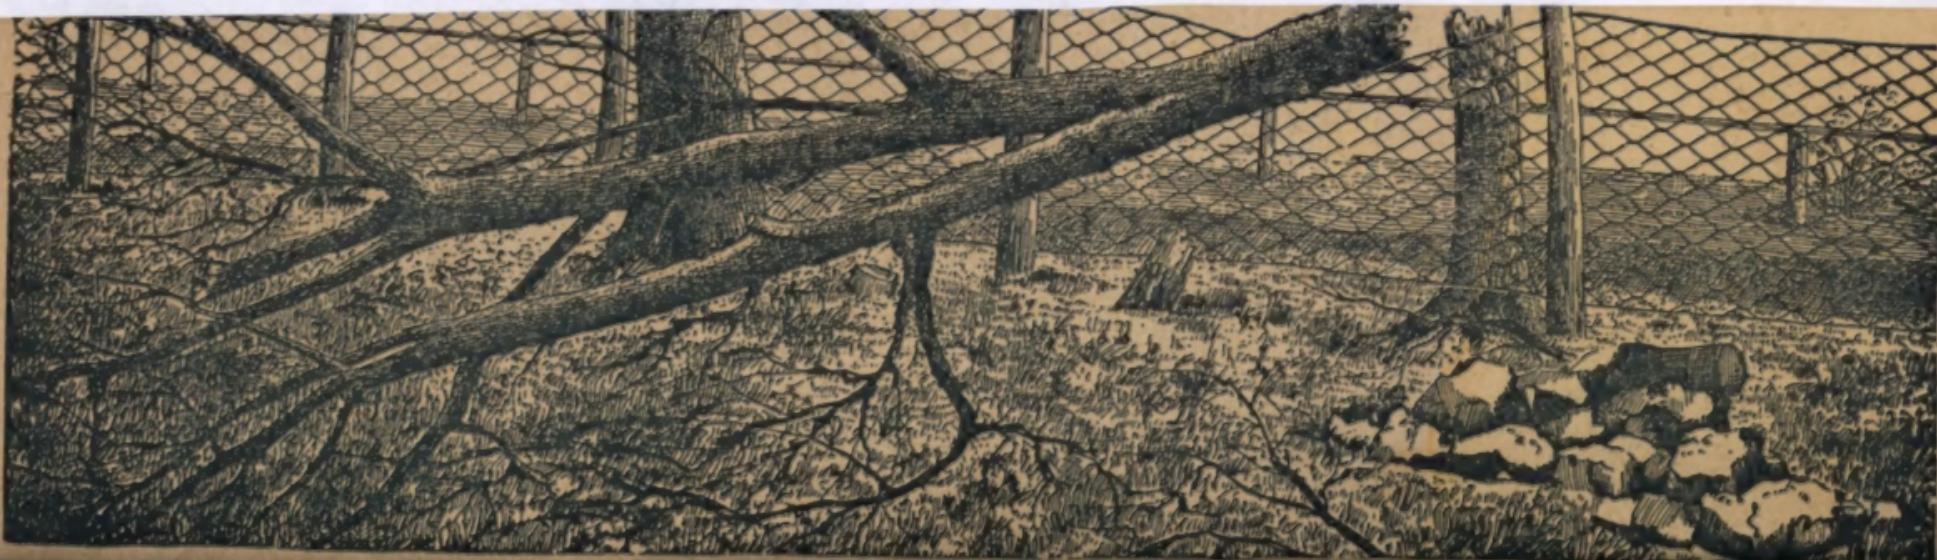

This cut is from a photograph taken on the spot:
The tree a heavy Maple blew over on
McMULLEN'S WOVEN WIRE FENCING
as shown; not a strand broken;
Comment is unnecessary.

